

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :  
H04N 7/00, 5/44, 7/173, G06F 13/00

A1

(11) International Publication Number: WO 99/45709

(43) International Publication Date: 10 September 1999 (10.09.99)

(21) International Application Number: PCT/IB99/00461

(22) International Filing Date: 8 March 1999 (08.03.99)

(30) Priority Data:  
98400541.3 6 March 1998 (06.03.98) EP

(71) Applicant (for all designated States except US): CANAL+ SOCIETE ANONYME [FR/FR]; 85/89, quai André Citroën, F-75711 Paris Cedex 15 (FR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): REY, François [FR/FR]; 10, avenue du Professeur-Calmette, F-92130 Issy-les-Moulineaux (FR).


(74) Agents: COZENS, Paul, Dennis et al.; Mathys & Squire, 100 Grays Inn Road, London WC1X 8AL (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: MULTIMEDIA TERMINAL ADAPTED FOR MULTIPLE USERS

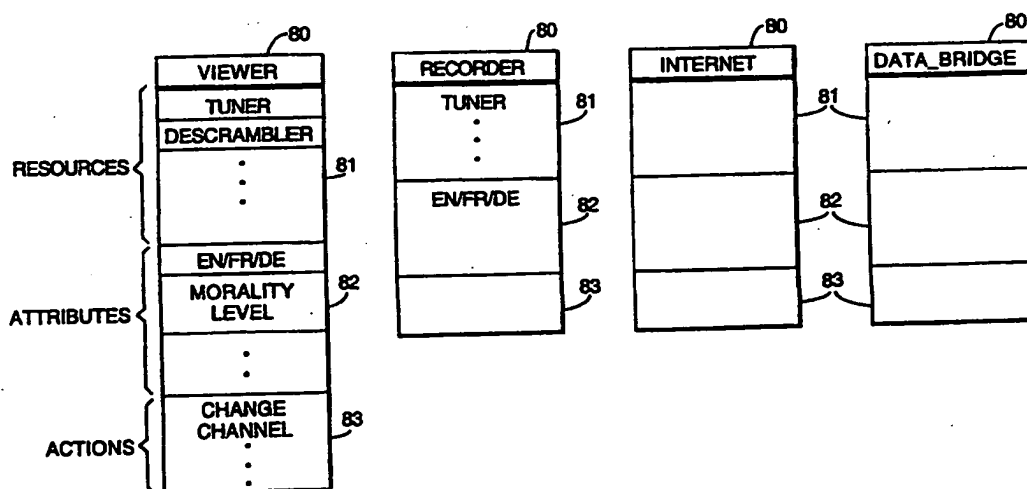

(57) Abstract

A terminal for processing digital audio-visual or multimedia data including a data processing system and a memory, the data processing system storing user profile data (81, 82, 83) relating to the characteristics or preferences of multiple users (80) of the terminal. In a particularly preferred embodiment, the user profiles correspond to modes of operation of the terminal, the user profile data including priority data indicating the priority rights of each user to terminal resources.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

MULTIMEDIA TERMINAL ADAPTED FOR MULTIPLE USERS

The present invention relates to a terminal for processing digital audio-visual or multimedia data.

- 5 Terminals of this kind are well-known in the field of pay TV systems, where a decoder or set-top-box receives broadcast digital multimedia data, including audiovisual program information, as well as data for generating on-screen menus, data for implementing gaming or shopping applications etc. Depending on the system, the data may be broadcast in scrambled or clear form.
- 10 Prior to the introduction of digital technology, decoders were connected to a limited number of devices, usually only an associated television display or, at maximum, a television display and a VHS recorder. The advent of digital technology has led to an explosion in the number of devices that may be connected to the decoder as well as the functionalities of the decoder. For example, in addition to a Peritel analogue output to a TV and VHS device, the decoder may also include a connection via a
- 15 digital bus, such as the IEEE 1394 bus, to other digital devices such as a DVD recorder, a PC etc.

- As a complement to the increase in the number of external devices that may be connected to the decoder, there has been an increase in the number of modes of operation of a device. For example, in the standard set up of decoder and television, the decoder may be used either to simply supply
- 20 television broadcast information, or to provide a connection to the internet.

- In evolving away from the traditional analogue system, the architecture of presently known digital decoders has nevertheless tended to follow the preconceptions guiding their design. In particular, the architecture of standard decoders does not accurately reflect the role of a terminal in routing data
- 25 between many external devices in parallel, the modes of operation of the decoder and the number of users of the system that may exist.

According to the present invention, there is provided a terminal for processing digital audio-visual or multimedia data including a data processing system and a memory, characterised in that the data

processing system stores in the memory user profile data relating to the characteristics or preferences of a plurality of types of user of the terminal.

5 The definition of a user profile enables the processing system to flexibly treat and handle a number of users of the terminal. As will be appreciated, whilst a user profile may be associated with the connection of an external device or the personal identity of the operator accessing the terminal it is preferably associated with a mode of operation, for example, internet mode or television mode.

10 A user profile may also further be personalised for one or more operators. For example, after defining a user profile for the internet mode of operation of the terminal, it may be possible to define a first internet operator having certain rights and a second operator having other rights.

15 Advantageously, the user profile data includes resource data indicating the resources within the terminal accessible by each user. In the case of a decoder terminal, these resources may include rights of access to the demultiplexer to determine the data downloaded from the broadcast data stream etc.

20 Further advantageously, the user profile data includes priority data indicating the priority of each user in respect of access to one or more resources of the terminal. For example, for a decoder terminal, the user profile data may include a priority level indicating the priority of a particular user in accessing the demultiplexer. Conflicting channel demands between, for example, a TV device user and a recorder device user can thereafter be resolved by a management application based on this information.

25 In addition to resource data indicating the terminal resources available to a given device, the user profile data may further comprise data relating to the attributes of information to be supplied to each user. These attributes may include, for example, an indication of the language to be used in all graphical interface displays for that user.

In addition, the user profile data may further include data relating to the actions permitted by each user, such as whether a given user may change the demux channel etc. Although closely related to the resource data described above, this data may be used to define the parameters of the operations permitted by each device having access to a given resource.

5

Preferably, some or all of the characteristics or preferences of the user profile data may be modified during normal operation of the terminal by an operator. For example, the relative priority values of each user in accessing data may be modified by a viewer to give a VHS recorder output priority over a television output, or an internet connection priority over the television etc. In addition, or alternatively, some or all of the user profile data may be predetermined by the data processing system of the terminal.

10

The present invention is particularly adaptable to a terminal comprising a data processing system comprising, inter alia, a virtual machine and an object oriented application interface layer comprising a plurality of class libraries.

15

In particular, the application interface layer may comprise one or more class libraries defining the operation of the virtual machine with respect to user profile data. These classes may include, for example, a class library dedicated to management of user profile data in the memory cache of the terminal. Equally, the classes may include one or more user profile class libraries to define the characteristics of the data to be stored in the user profiles. For example, a method class may be used to define the attributes of the preferred language to be stored in the user profile.

20

The behaviour of classes within the application interface layer will depend on the language chosen. In the case of an application interface written in Java, for example, a single inheritance structure may apply between a class and its subclasses.

25

In one embodiment, the user profile classes may include a generic class library associated with the definition of generic characteristics of user profile data, and one or more sub-class libraries associated with the definitions of characteristics associated with a specific user profile.

30

The present invention is particularly applicable to a terminal in the form of a decoder adapted to receive data transmissions in a digital transmission system.

- 5 The present invention may equally extend to a method of operation of a terminal.

The term "decoder" may describe a receiver for receiving either encoded or non-encoded signals, for example, television and/or radio signals. Embodiments of such a decoder may include a decoder integral with the receiver for decoding the received signals, for example, in a "set-top box", such a decoder  
10 functioning in combination with a physically separate receiver, or a decoder integrated with additional elements, such as a web browser or a video recorder or a television.

As used herein, the term "digital transmission system" includes any transmission system for transmitting or broadcasting for example primarily audiovisual or multimedia digital data. Whilst the present invention  
15 is particularly applicable to a broadcast digital television system, the invention may also be applicable to a fixed telecommunications network for multimedia internet applications, to a closed circuit television, and so on.

There will now be described, by way of example only, a preferred embodiment of the invention in  
20 which:

Figure 1 shows a digital television system including a multimedia terminal in the form of a decoder;

Figure 2 shows the physical elements of the decoder of Figure 1;

25

Figure 3 shows the software architecture of the data processing system within the decoder;

Figure 4 shows the structure of the virtual machine used in the data processing system of Figure 3;

30 Figure 5 shows a set of predetermined user profiles to be defined in this embodiment of the invention;

Figure 6 shows the elements of user profile data stored in the decoder memory for each of the user profiles of Figure 5; and

- 5 Figure 7 shows the structure of class libraries within the application interface layer of the software architecture to be used in the definition of the user profiles.

An overview of a digital television system 1 according to the present invention is shown in Figure 1. The invention includes a mostly conventional digital television system 2 that uses the known MPEG-2  
10 compression system to transmit compressed digital signals. In more detail, MPEG-2 compressor 3 in a broadcast centre receives a digital signal stream (typically a stream of video signals). The compressor 3 is connected to a multiplexer and scrambler 4 by linkage 5.

The multiplexer 4 receives a plurality of further input signals, assembles the transport stream and  
15 transmits compressed digital signals to a transmitter 6 of the broadcast centre via linkage 7, which can of course take a wide variety of forms including telecommunications links. The transmitter 6 transmits electromagnetic signals via uplink 8 towards a satellite transponder 9, where they are electronically processed and broadcast via notional downlink 10 to earth receiver 12, conventionally in the form of a dish owned or rented by the end user. The signals received by receiver 12 are transmitted to an  
20 integrated receiver/decoder 13 owned or rented by the end user and connected to the end user's television set 14. The receiver/decoder 13 decodes the compressed MPEG-2 signal into a television signal for the television set 14.

Other transport channels for transmission of the data are of course possible, such as terrestrial  
25 broadcast, cable transmission, combined satellite/cable links, telephone networks etc.

In a multichannel system, the multiplexer 4 handles audio and video information received from a number of parallel sources and interacts with the transmitter 6 to broadcast the information along a corresponding number of channels. In addition to audiovisual information, messages or applications

or any other sort of digital data may be introduced in some or all of these channels interlaced with the transmitted digital audio and video information.

A conditional access system 15 is connected to the multiplexer 4 and the receiver/decoder 13, and is located partly in the broadcast centre and partly in the decoder. It enables the end user to access digital television broadcasts from one or more broadcast suppliers. A smartcard, capable of deciphering messages relating to commercial offers (that is, one or several television programmes sold by the broadcast supplier), can be inserted into the receiver/decoder 13. Using the decoder 13 and smartcard, the end user may purchase commercial offers in either a subscription mode or a pay-per-view mode. In practice, the decoder may be configured to handle multiple access control systems, e.g. of the Simulcrypt or Multicrypt design.

As mentioned above, programmes transmitted by the system are scrambled at the multiplexer 4, the conditions and encryption keys applied to a given transmission being determined by the access control system 15. Transmission of scrambled data in this way is well known in the field of pay TV systems. Typically, scrambled data is transmitted together with a control word for descrambling of the data, the control word itself being encrypted by a so-called exploitation key and transmitted in encrypted form.

The scrambled data and encrypted control word are then received by the decoder 13 having access to an equivalent of the exploitation key stored on a smart card inserted in the decoder to decrypt the encrypted control word and thereafter descramble the transmitted data. A paid-up subscriber will receive, for example, in a broadcast monthly ECM (Entitlement Control Message) the exploitation key necessary to decrypt the encrypted control word so as to permit viewing of the transmission.

An interactive system 16, also connected to the multiplexer 4 and the receiver/decoder 13 and again located partly in the broadcast centre and partly in the decoder, enables the end user to interact with various applications via a modem back channel 17. The modem back channel may also be used for communications used in the conditional access system 15. An interactive system may be used, for



example, to enable the viewer to communicate immediately with the transmission centre to demand authorisation to watch a particular event, download an application etc.

5 Referring to Figure 2, the physical elements of the receiver/decoder 13 or set-top box adapted to be used in the present invention will now be described. The elements shown in this figure will be described in terms of functional blocks.

The decoder 13 comprises a central processor 20 including associated memory elements and adapted to receive input data from a serial interface 21, a parallel interface 22, and a modem 23  
10 (connected to the modem back channel 17 of Fig 1).

The decoder is additionally adapted to receive inputs from an infra-red remote control 25 via a control unit 26 and from switch contacts 24 on the front panel of the decoder. The decoder also possesses two smartcard readers 27, 28 adapted to read bank or subscription smartcards 29, 30 respectively.  
15 Input may also be received via an infra-red keyboard (not shown). The subscription smartcard reader 28 engages with an inserted subscription card 30 and with a conditional access unit 29 to supply the necessary control word to a demultiplexer/descrambler 30 to enable the encrypted broadcast signal to be descrambled. The decoder also includes a conventional tuner 31 and demodulator 32 to receive and demodulate the satellite transmission before being filtered and demultiplexed by the unit 30.

20 Processing of data within the decoder is generally handled by the central processor 20. The software architecture of the central processor corresponds to a virtual machine interacting with a lower level operating system implemented in the hardware components of the decoder.

## 25 DECODER SYSTEM ARCHITECTURE

Turning now to the architecture of the system within the receiver/decoder shown in Figure 3, it will be seen that a layered architecture is used. The first layer 41 represents the operating system of the hardware of the receiver/decoder. This is a real-time operating system chosen by the manufacturer to control the  
30 hardware elements of the receiver/decoder. The real-time operating system has a relatively fast response

time in order to be able to correctly synchronise hardware operations. Event messages are passed between this layer and the middleware layer 42 immediately above.

5 The data processing system sits on top of the hardware operating system and comprises a middleware layer 42 and an application interface layer 43.

The middleware layer 42 is written in a language such as C ANSI and comprises the elements of a virtual machine 44 and a number of interfaces 45 including a graphical interface 46, a FLASH/PROM memory interface 47, a protocol interface 48 and a device interface 49.

10

The present invention uses a virtual machine in order to provide independence between upper level applications and the lower level operating system implemented by the set top box manufacturer. The interfaces 45 provide the link between operations of the virtual machine and the lower level operating system 41 and also include a number of intermediate level application modules more easily executed at  
15 this level.

The application interface (API) layer 43 comprises a number of high level packages 50-55, written in an object-oriented interpretative language, such as Java. These packages provide an interface between the applications created by the service provider (interactive program guide, teleshopping, internet browser  
20 etc) and the virtual machine of the system. Examples of such applications are given below.

The lower level OS is normally embedded in the hardware components of the decoder, although in some realisations, the lower level OS can be downloaded. The middleware and application interface layer packages can be downloaded into the RAM or FLASH memory of the decoder from a broadcast  
25 transmission. Alternatively, some or all of the middleware or application interface layer elements can be stored in the ROM or (if present) FLASH memory of the decoder. The decoder may even include a hard disc or DVD drive for memory storage purposes. As will be understood, the physical organisation of the memory elements of the decoder is distinct from the logical organisation of the memory.

APPLICATION INTERFACE LAYER

Referring to the application interface layer 43 shown in Figure 3, and as described above, the packages in this layer are written with an object oriented language such as Java. Each package defines a set of class libraries called on during operation of the system. In the present system the following packages are installed.

Lang/util Package 50. This package defines the classes necessary for the manipulation of objects by the virtual machine. These class libraries normally form part of a standard library associated with the object oriented language chosen.

MHEG-5 Package 51. This package defines the classes associated with the manipulation of graphical objects on the television display. Such objects are distinct from audio-visual data and can make up, for example, channel identifiers or text laid over displayed images. The definition of classes within this package should respect the MHEG-5 norms defined by the standards ETS 300777-3 and ISO/ISE 13522-5 (and the standard ISO/ISE 13522-6 in the case of a Java implemented system).

Toolbox Package 52. This package contains the classes used for downloading and decompression of information as well as the classes associated with the management of the file system and memory within the receiver/decoder and the classes associated with the connection to the internet etc.

Device Package 53. This package defines the classes necessary for management of peripherals attached to the receiver/decoder, as discussed above and including the modem, the smart card readers, the MPEG flow tuner etc.

Service Package 54. This package defines the classes necessary for the implementation of developing higher level interactive applications, such as management of credit card data etc.

DSMCC-UU Package 55. This package implements the protocols necessary for communication between a client and a server for data file search and reading. Implementation of this package should respect the norm ISO/IEC 13818-6 and directives defined in DAVIC part 9.

- 5 In normal operation, a further layer of interactive applications, written by the service provider and downloaded during broadcast as in conventional systems, will be laid over the interface packages defined above. These applications typically include a general application manager for managing the defined basic operations of the decoder, and one or more optional applications adding additional services. In particular, a user manager application may be used to manage user priority conflicts, as will be described below.

10

Depending on the applications to be introduced, some of the above packages may be omitted. For example, if the service provider does not intend to provide a common way for data reading, the DSMCC-UU package may be left out of the final system.

- 15 The packages 43 provide class libraries for an object-oriented programming environment. Their class behaviour will depend on the language chosen. In the case of a Java application, for example, a single inheritance class structure will be adhered to.

- As will be understood, the grouping of a class or a set of classes in a package is a matter of formalism with respect to the functionality of a class. Certain classes related to management of peripheral devices may be, for example, classified either as belonging to the Device Package 53 or the Service Package 54.

### INTERFACE LAYER

- 25 As shown, the interface layer is composed of four modules, a graphics module 46, a memory file management module 46, a protocol module 48 and a device manager 49. Whilst the modules at this level are described as interface modules their function is to provide a "glue" layer for the implementation of the application interface packages and for the operation of the virtual machine generally.

The graphics module 46, for example, provides the creation and management of graphical objects. It asks the low level OS to display basic graphic shapes such as single pixels, lines, rectangles etc. The implementation of this module depends on the graphics capability of the low level manufacturer's OS. In some ways complementary to the MHEG-5 package 51, these functions may be more efficiently executed at this code level than in the high level code chosen for the application layer above.

In a similar manner, the memory file management module 47 includes low level read/write file commands associated with the memory components of the system. Typically, the hardware operating system only includes commands necessary to read/write a sector or page within a memory component. As with the graphics module 46, this module enables a set of simpler lower level applications to be efficiently introduced in the system.

The protocol management module 48 defines a library of communication protocols that may be called upon in communications via, for example, the TCP/IP layer of the decoder.

The device manager 49 is slightly different from the other modules in this layer in that it provides the link or interface between the hardware operating system and the layers above, including the other modules in the interface layer and the virtual machine. Commands or event messages that are received/sent to the hardware OS from the virtual machine, for example, are necessarily passed by the device manager for conversion according to the interface specifications between the two levels.

#### VIRTUAL MACHINE DESCRIPTION

Referring now to Figure 4, the structure of the virtual machine 44 used in the system of the present invention will be described. The virtual machine used in the present invention is a pre-emptive multithread type machine. The general characteristics of such a machine are known in other contexts and the creation of code for implementation of such a machine will be within the scope of one skilled in the art.

The virtual machine is composed of a number of elements, which interact broadly as shown in Figure 4.

The scheduler 60, composed of a thread manager service 61 and a monitor manager service 62, forms

the heart of the multithread machine. The scheduler 60 orders the execution of threads created by applications externally of the virtual machine and those created by the virtual machine itself (e.g. a garbage collection thread as discussed below).

- 5 The event manager 63 handles an event routing table and the lists of events subscribed to by the threads and centralises the dispatch of event treatments.

The memory manager 64 handles the allocation and disallocation of the memory zones within the system memory and also handles the removal from the memory of non-referenced objects (garbage collection).

10

The class manager 65 charges the classes of the application code downloaded in a broadcast signal, interacting with the security manager 66 to check the integrity of downloaded code and with the file manager 68, which implements the applications.

- 15 The file manager 68 carries out the implementation of the system files and handles the mechanism of downloading of interactive applications and data.

The security manager 66 handles the level of access permitted to downloaded applications, some applications having the ability to carry out more operations than others in relation to the file system.

20

The interpreter 67 comprising a bytecode interpretation service 69 and a "m-code" interpretation service 70 handles the interpretation of applications written in these two codes, bytecode being associated with Java applications and m-code being the name given to a proprietary code developed by the applicants.

25 USER PROFILES

The increasing hardware processing power available in decoders has led to the increasing use of decoders in the routing of information between a number of potential users of the system. For example, a single IRD can serve as the input point for a broadcast MPEG stream, this stream being processed and

diverted to one or more connected television displays, an analogue VHS recorder connected via a Peritel link, a PC or DVD device connected via an IEEE 1394 bus etc.

5 An idea central to the present embodiment is the definition of a number of "users" of the decoder, each user having a certain characteristic profile. For example, a high level application may define a number of user profiles for a television viewer, a VHS recorder, a person directly using the decoder to access to the internet, a person using the decoder to route information to a PC etc. Figure 5 shows an example of a set of typical user profiles. This list may be expanded to include, for example, a DVD device connected to the decoder etc.

10 A user profile may be defined in relation to an external device connected to terminal, for example the connection television, where the terminal simply supplies audiovisual data to the television display. The user profile may also be defined in relation to the actual identity of one or more physical persons or "operators" accessing the terminal.

15 In the present case, however, a user profile is defined in relation to a mode of operation of the device, such as its operation in an internet mode. Each user profile defined for one set up or mode of operation may be personalised for the different persons using the decoder terminal. For example, one person may have different viewing preferences from another, or may be prohibited from watching  
20 certain channels. The information regarding the preferences of each person is stored within the user profile for that mode of operation.

Each user profile will have a unique and characteristic user ID and one or more priority values determining the priority of this user in obtaining one or more decoder resources. In this case, the term "resources"  
25 refers to a functionality of the decoder such as access to the demultiplexer to download selected data. The high level application manager defines and stores the characteristics of these profiles and handles the sharing of resources and user conflicts with reference to the user priority.

For example, a user manager may give priority to a user "RECORDER" for example, such that a demand  
30 by this user to use a given resource will take priority over a demand by the user "VIEWER" to use that

resource. In particular, the user "RECORDER" may have preference over the user "VIEWER" as far as choice of demux channel is concerned. In this way, the application prevents a change channel signal received from a viewer from taking priority over the channel chosen by someone wishing to record a program being transmitted at the same time.

5

In this example, where a single priority value is assigned to each user, the user "RECORDER" will always take priority over "VIEWER" for access to any resource. Alternatively, multiple priority values may be assigned, such that "VIEWER" has priority for certain resources, "RECORDER" priority for others etc.

- 10 The priority evaluation is handled by the user manager and may be interactive, i.e. an operator may determine by programming the decoder with the handset whether to give priority to an internet connection over television viewing etc.

- Each user profile includes, in addition to the user ID value, a set of preferences stored in a cache memory  
15 in the decoder, for example, in the FLASH memory of the decoder. These preferences will be called up by the application upon at each booting up of the decoder. As shown in Figure 6, user profile data 80 includes resource data 81, attribute data 82, and action data 83.

- The resource data 81 includes a list of internal decoder resources that may be accessed by the user,  
20 for example, access to the MPEG tuner and descrambler. As will be understood, a resource in this context refers to a logical resource relating to a combination of physical elements associated with a demux process, a conditional access system etc.

- Attribute data 82 includes preferred attributes specific to that user, for example, the language (English,  
25 French, German etc.) that will be preferentially used in written displays on the screen, the morality level of programmes that can be viewed by the user etc. The action data 83 includes a list of permitted actions that may be carried out by that user, including change channel etc.

- The user profile data can include fixed values predetermined by the user manager (for example, all users  
30 are capable of accessing the resources of the tuner, the demultiplexer etc.) as well as values modifiable



by and personalised to each operator capable of using the terminal in each operating mode (morality level of programmes that may be watched etc.).

5 Values modifiable by an operator can include values for each user profile set by an operator at the moment of start-up of the decoder as well values set by an operator each time a session is started with a particular user profile.

10 The definition of multiple user profiles corresponding to modes of operation and including data regarding priority to terminal resources for each profile paves the way for parallel processing of such modes by the terminal so as to permit, for example, a single terminal to handle and process data for viewing via a television at the same time as forwarding different data to be recorded by an associated recording device, treated by a PC etc. In such systems the terminal becomes effectively a data hub for a number of associated peripheral devices operating in parallel. This sort of operation is particularly well managed by a multithread system of the kind shown in relation to Figures 3 and 4, and as will now be described.

15 In order to permit the creation of a series of user profiles, it is desirable to include within the API layer object classes adapted to engage with the virtual machine to achieve this. Referring back to Figure 3, and as discussed above, the class libraries defined in the API layer 43 supply the parameters of operation within which the higher level applications may operate. In particular, in carrying out certain actions, a high level application will include instructions referring to classes of objects defined in this layer.

20

Each class will respect the rules of the object oriented programming language chosen for this layer. Typical object classes include classes relating to the management of the ports of the decoder, such as the credit card interface, as well as other operations such as management of the access control system. A number of standard classes in the API layer have been defined by the DAVIC group in relation to, for example, access to sections and tables in a downloaded MPEG stream.

25

There will now be described, with reference to Figure 7, a structure of classes adapted to provide the possibility of defining user preferences for each such user and to facilitate the handling of multiple users

by a high level application. The classes that will be described may be included, for example, in the Service Package 54 installed in the API layer 43.

Referring to Figure 7, a class UserCacheManager shown at 90 is used to permit applications to access  
5 and manage user profile data stored in the memory cache of the system. This class is a static class. As  
with standard object oriented program architectures, the class library includes a list of methods or  
commands such as a method initialise() to initialise the memory cache, a method getMaxUserProfiles() to  
know the maximum number of users to be supported by the system, a method getActiveUserID() to know  
the number of users currently active etc. The class may also be associated with a list of events, signalling  
10 to the application the occurrence of an event, such as the creation or deletion of a user profile.

The classes additionally include a class UserProfile shown at 91. This class is a generic class, adapted to  
permit the creation of a number of user profiles. The class includes a list of methods such as getUserID()  
to recover the identity of a user, getPriorityLevel() to recover the priority of access to resources,  
15 setGeneralAttribute() to set the value of a general attribute etc. The class is also associated with a list of  
events indicating, for example, a change of channel demanded by a user etc.

These methods are methods which permit an indirect access to methods, thereby avoiding the necessity  
of having a method for each attribute. The number of attributes managed by these methods will depend  
20 on the choice of the system architect and may evolve with time.

In practice, the choice and functionality of the number of methods in this and the other classes may also  
be determined at the discretion of the system architect and in dependence on the processing power of the  
hardware, the characteristics of the virtual machine, the number of functionalities the system architect  
25 wishes to introduce etc.

As will be described, some of the methods may be inherited by other classes in accordance with the  
principles of the object oriented language chosen for the application interface layer.

In particular, the classes ViewerProfile 92, RecorderProfile 93, InternetProfile 94, DataBridgeProfile 95, define methods specific to the definition of the user profile VIEWER, RECORDER, INTERNET, DATA\_BRIDGE etc. The classes 92 to 95 may include methods inherited from the generic UserProfile class 91. For example, using the command setGeneralAttribute (Attribute, Value of Attribute), the preferred value of an attribute associated with the user profile in question may be determined.

Taking the case of a viewer profile in which the morality level of a viewer is to be defined, the instruction

setGeneralAttribute (Morality-Level, 18)

10

in the context of programming the profiles for the user VIEWER will set an authorised age limit for this user. This value will be defined and called up by a higher level application and can be used to prevent access by the user VIEWER to certain demux channels, unless the operator declares his age. For each person having access to the decoder in the mode VIEWER, a set of preferences may thus be defined by instances within the class VIEWER.

15

As will be understood, the definition in the API of a number of classes specific to the creation of an identified "user" enables the system to easily define a plurality of user profiles for each of these users. The provision of a class UserCacheManager permits the handling of cached profile data relating to a user, whilst the generic classes UserProfile and the sub-classes ViewerProfile, RecorderProfile etc. provide the tools necessary for the definition of each user profile.

20

The exact composition and definition of the methods and events within these classes is however discretionary and it will be within the competence of one skilled in the art to determine the best definition of such objects in dependence on the characteristics of the chosen virtual machine etc.

25

CLAIMS

1. A terminal for processing digital audio-visual or multimedia data including a data processing system and a memory, characterised in that the data processing system stores in the memory user profile data  
5 relating to the characteristics or preferences of a plurality of types of user of the terminal.

2. A terminal as claimed in claim 1, where the user profile is defined in relation to a mode of operation of the terminal.

10 3. A terminal as claimed in claim 1 or 2, where the user profile is defined in relation to the connection of an external device.

4. A terminal as claimed in any preceding claim, where a user profile is personalised in relation to the identity of the operator.

15

5. A terminal as claimed in any preceding claim, where the user profile data includes resource data indicating the resources within the terminal accessible by each user.

20 6. A terminal as claimed in claim 5 where the user profile data includes priority data indicating the priority of each user in respect of access to one or more resources of the terminal.

7. A terminal as claimed in any preceding claim where the user profile data comprises data relating to the attributes of information to be supplied to each user.

25 8. A terminal as claimed in any preceding claim where the user profile data comprises data relating to the actions permitted by each user.

9. A terminal as claimed in any preceding claim where some or all of the characteristics or preferences of the user profile data are modifiable during normal operation of the terminal by an operator.

30

10. A terminal as claimed in any preceding claim where some or all of the user profile data is predetermined by the data processing system of the terminal.

5 11. A terminal as claimed in any preceding claim where the terminal comprises a data processing system comprising, inter alia, a virtual machine and an object oriented application interface layer comprising a plurality of class libraries.

12. A terminal as claimed in claim 11, in which the application interface layer may comprise one or more class libraries defining the operation of the virtual machine with respect to user profile data.

10

13. A terminal as claimed in claim 11 or 12, in which the application interface layer comprises a class library dedicated to memory management of user profile data in the memory cache of the terminal.

15

14. A terminal as claimed in any of claims 11 to 13 in which the application interface layer comprises one or more user profile class libraries adapted to define the characteristics of the data to be stored in the user profiles.

20

15. A terminal as claimed in claim 14, in which the user profile class libraries comprise a generic class library associated with the definition of generic characteristics of user profile data, and one or more sub-class libraries associated with the definitions of characteristics associated with a specific user profile.


16. A terminal as claimed in any preceding claim comprising a decoder adapted to receive data transmissions in a digital transmission system.

25

17. A method of operation of a terminal for processing digital audio-visual or multimedia data including a data processing system and a cache memory characterised by the step of storing in the terminal memory user profile relating to the characteristics or preferences of plurality of users of the terminal.

18. A terminal for processing digital audio-visual or multimedia data substantially as herein described.
19. A method of operation of a terminal for processing digital audio-visual or multimedia data substantially as herein described.

Fig.1.

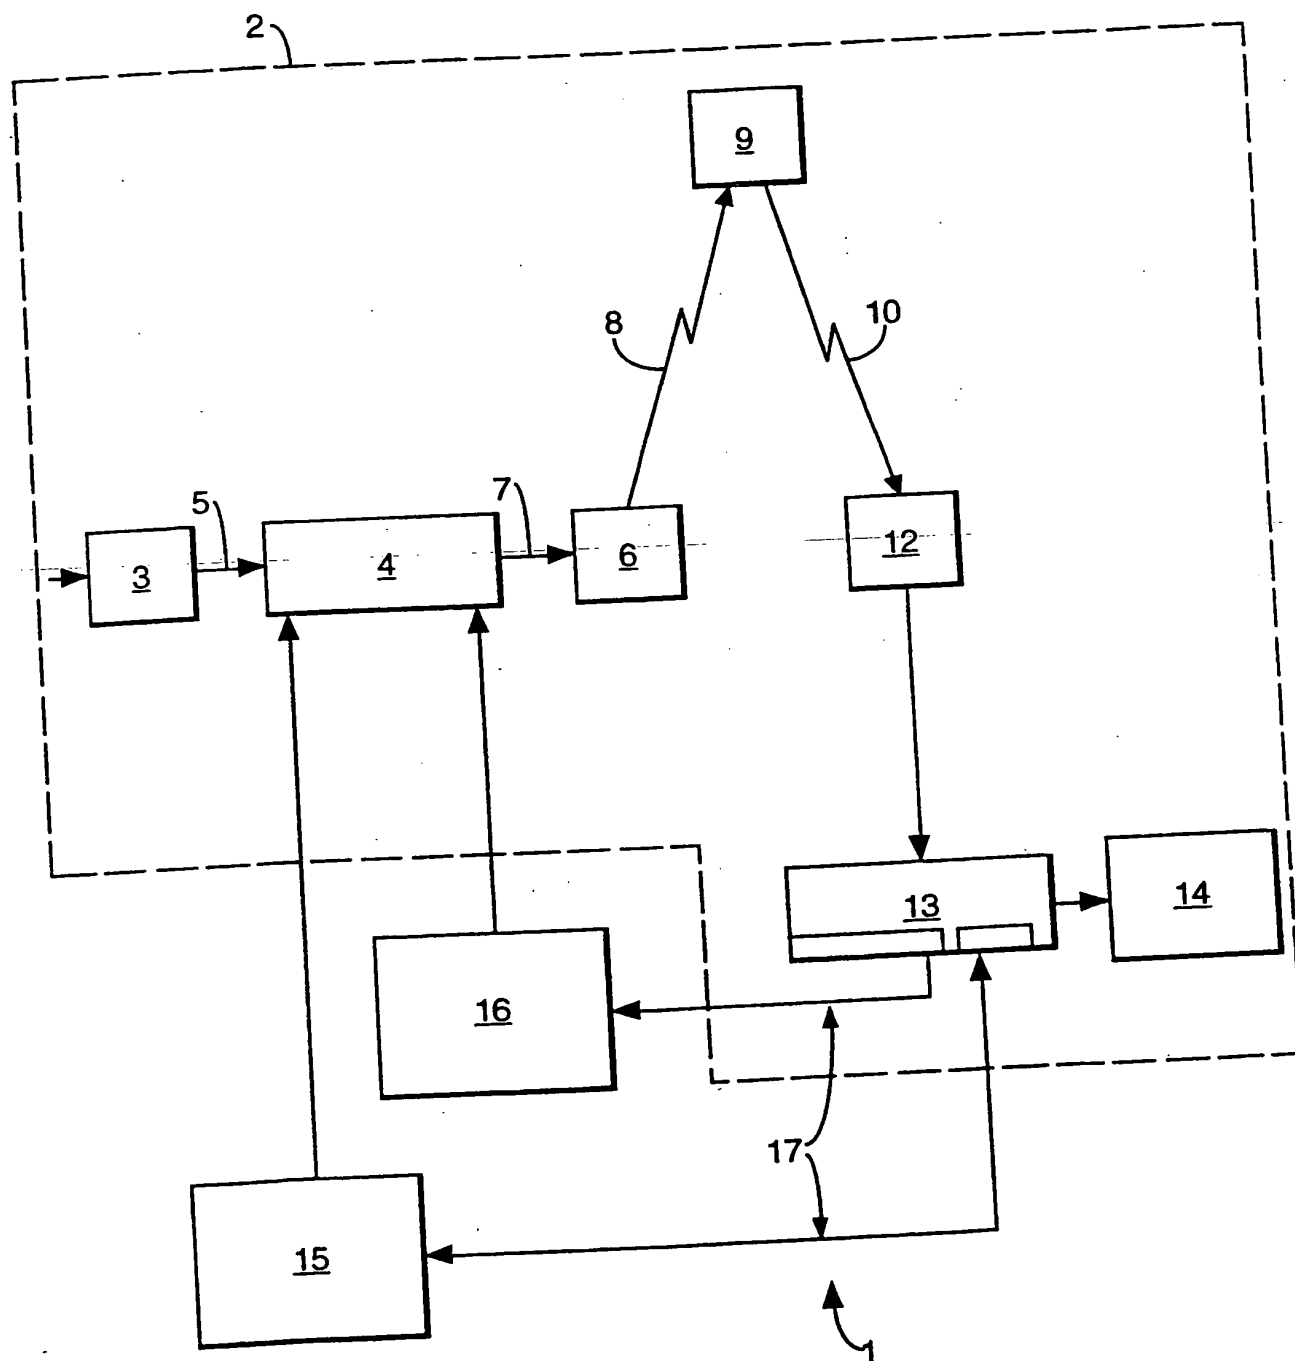

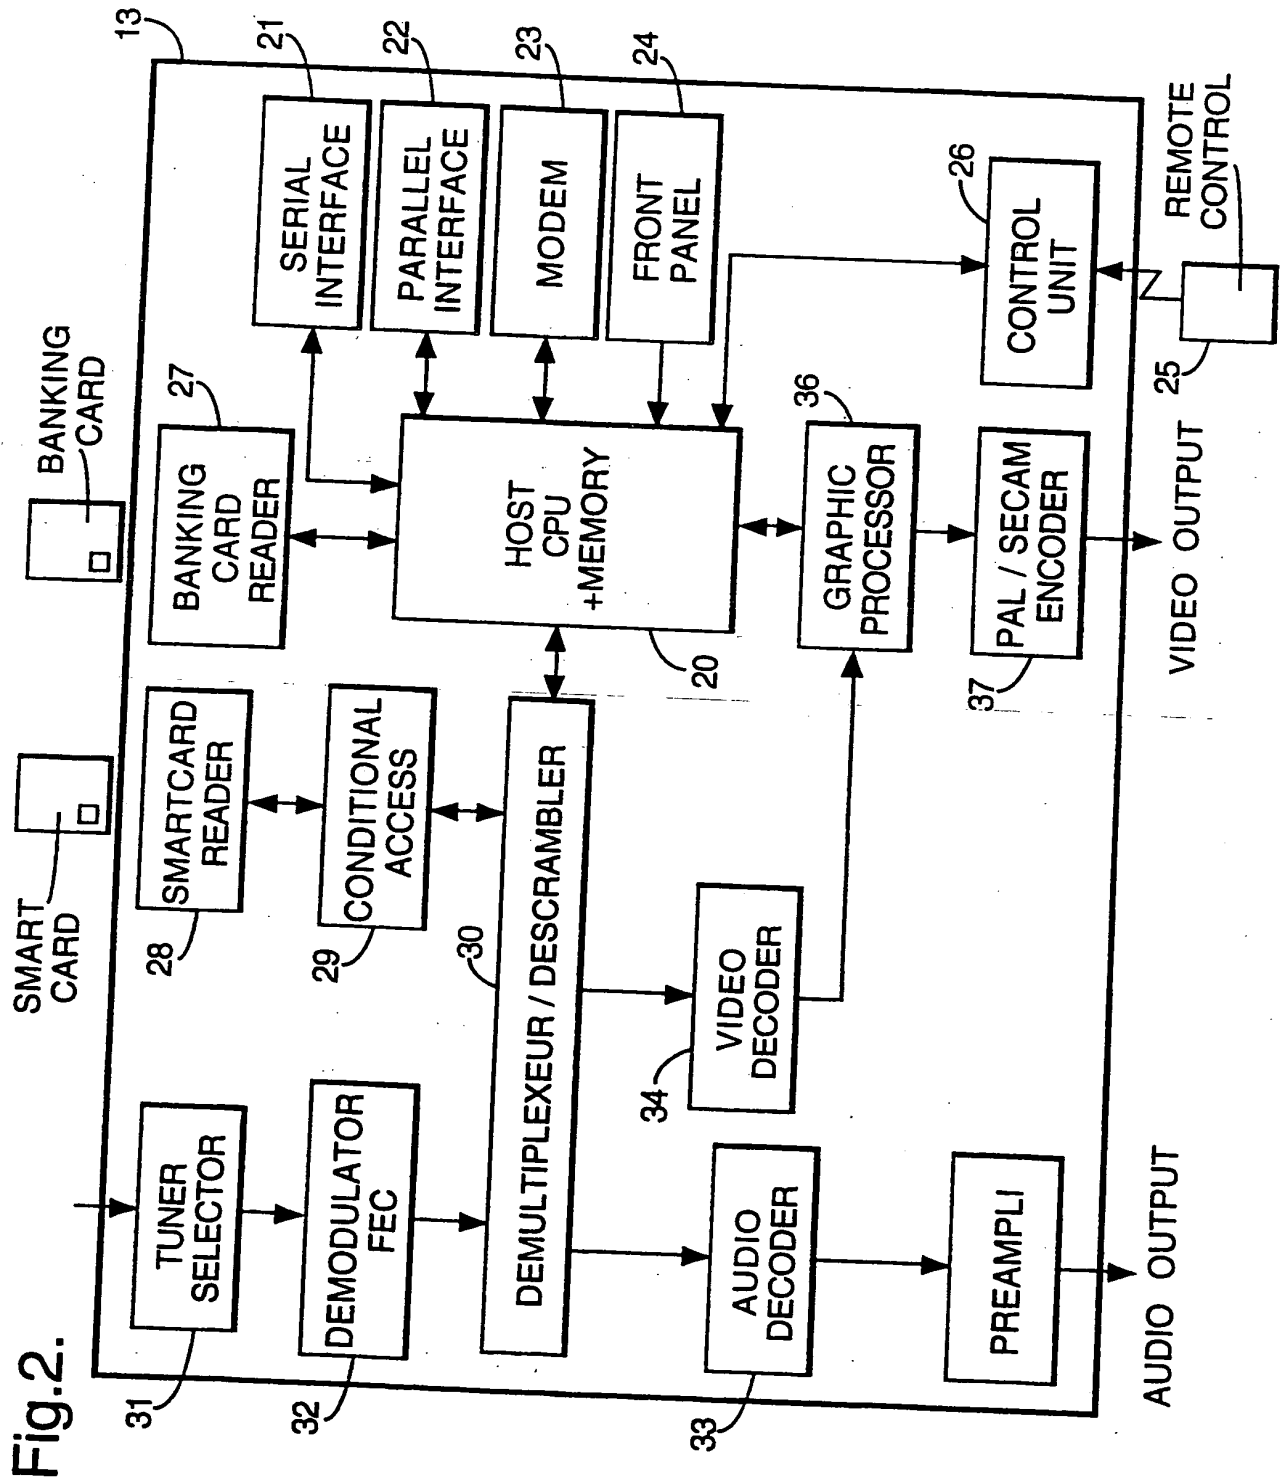
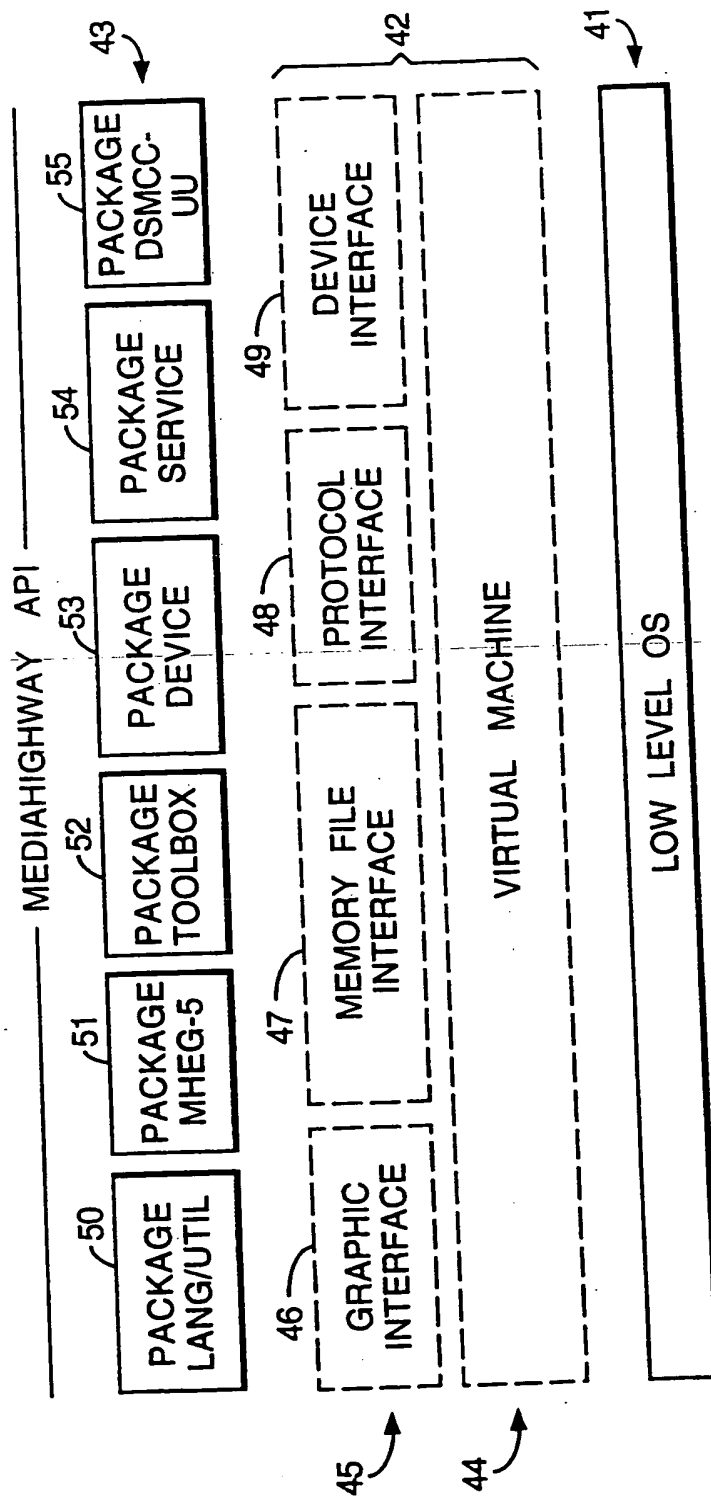
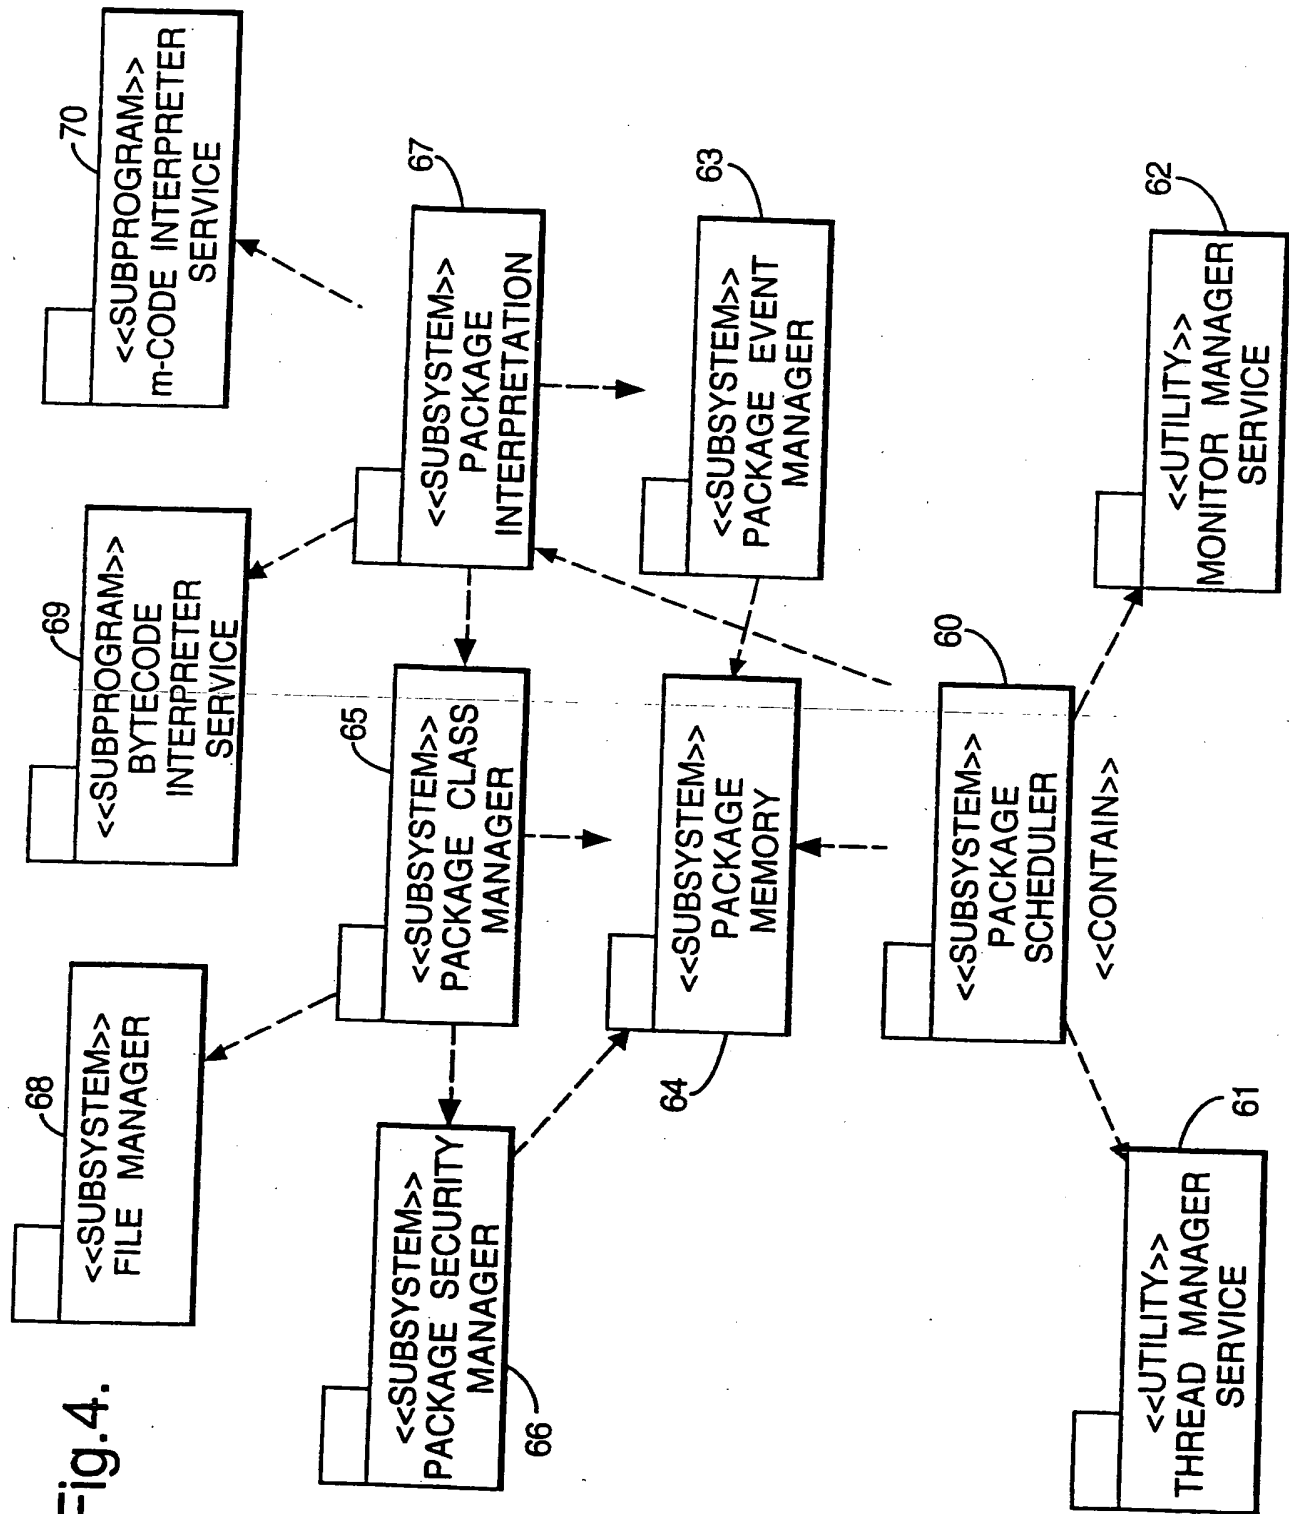




Fig.3.





**Fig.4.**

Fig.5.

Profile	Definition
VIEWER	Traditional user
RECORDER	System user recording on VHS device
INTERNET	User connecting to Internet
DATA_BRIDGE	System user routing information to PC

Fig.7.


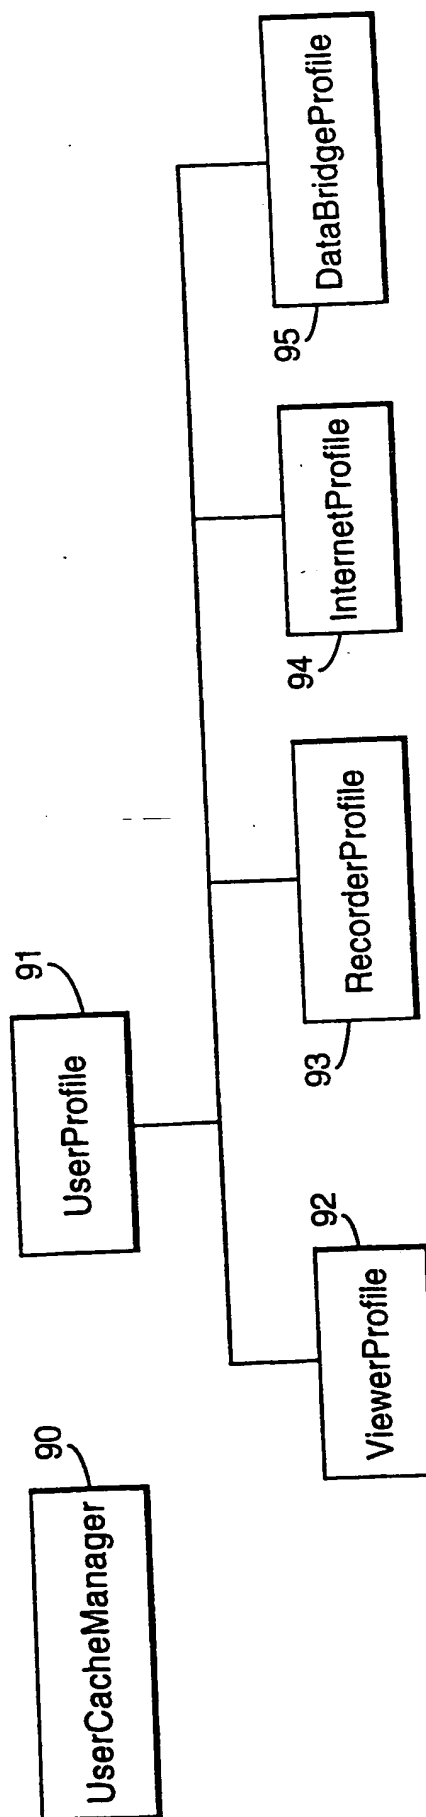


Fig.6.

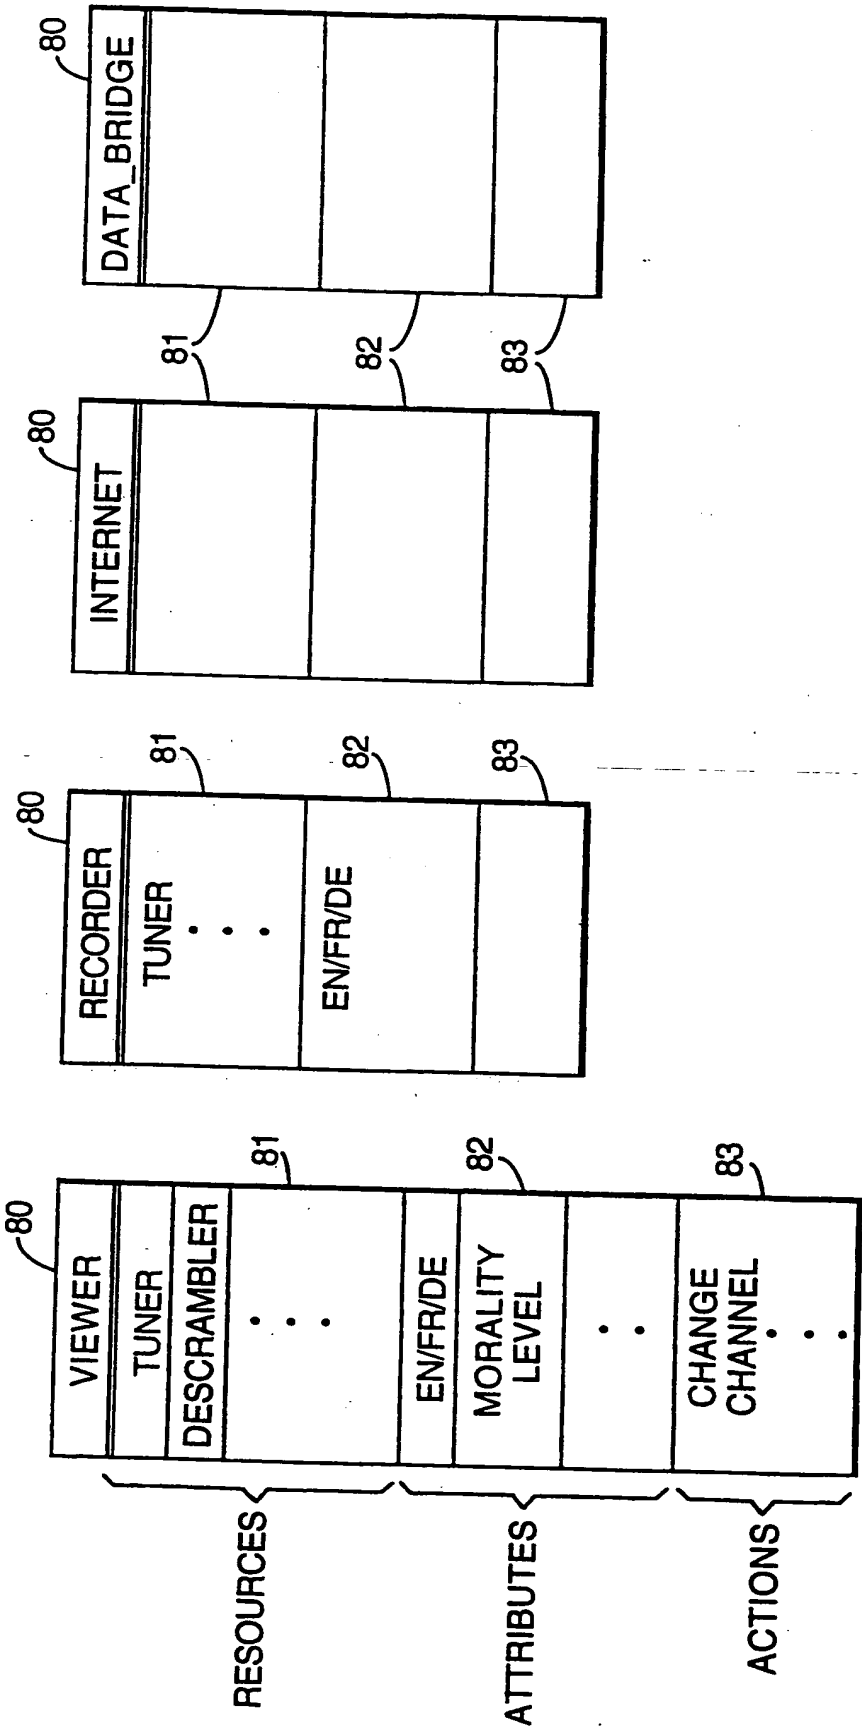

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 99/00461

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04N7/00 H04N5/44

H04N7/173

G06F13/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04N G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 306 702 A (HONEYWELL BULL) 15 March 1989	1-5, 7-10, 16, 17 6, 11
Y	see column 1, line 30 - line 35; figure 1 see column 7, line 46 - column 8, line 24 see column 9, line 25 - line 30	1, 2, 17
X	EP 0 435 370 A (PHILIPS NV) 3 July 1991 see column 1, line 10 - line 29 see column 6, line 33 - line 39	1
X	WO 97 44943 A (TELECOM FINLAND OY) 27 November 1997 see page 5, line 29 - page 6, line 14	6
Y	EP 0 059 293 A (IBM) 8 September 1982 see abstract	

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 May 1999

Date of mailing of the international search report

07/06/1999

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Raeymaekers, P

# INTERNATIONAL SEARCH REPORT

Intern: al Application No

PCT/IB 99/00461

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>MOHAMMED I ET AL: "DESIGN FOR DYNAMIC USER-ROLE-BASED SECURITY"</p> <p>COMPUTERS &amp; SECURITY INTERNATIONAL JOURNAL DEVOTED TO THE STUDY OF TECHNICAL AND FINANCIAL ASPECTS OF COMPUTER SECURITY, vol. 13, no. 8, 1 January 1994, pages 661-671, XP000481481</p> <p>see the whole document</p>	1-10, 16, 17
Y	<p>WO 97 41541 A (VERIFONE INC ; WILLIAMS HUMPHREY (US); HUGHES KEVIN (US); PARMAR BI) 6 November 1997</p> <p>see page 11, line 1 - line 5</p>	11
A	<p>see page 11, line 25 - page 12, line 5</p> <p>see page 23, line 1 - line 5</p>	12-15

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 99/00461

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0306702 A	15-03-1989	US 4858117 A	15-08-1989
		AU 611468 B	13-06-1991
		AU 2052288 A	09-02-1989
		CA 1315007 A	23-03-1993
		CN 1033119 A,B	24-05-1989
		DE 3889816 D	07-07-1994
		DE 3889816 T	19-01-1995
		DK 439088 A	08-02-1989
		ES 2053640 T	01-08-1994
		FI 883566 A	08-02-1989
		JP 1099147 A	18-04-1989
		JP 1865197 C	26-08-1994
		KR 9403325 B	20-04-1994
		MX 166611 B	21-01-1993
		NO 174528 B	07-02-1994
		YU 151988 A	31-08-1991
EP 0435370 A	03-07-1991	US 5005084 A	02-04-1991
		DE 69007600 D	28-04-1994
		DE 69007600 T	22-09-1994
		JP 5014757 A	22-01-1993
WO 9744943 A	27-11-1997	FI 964200 A	22-11-1997
		AU 2900297 A	09-12-1997
		EP 0895687 A	10-02-1997
EP 0059293 A	08-09-1982	BR 8200851 A	28-12-1982
		CA 1172381 A	07-08-1984
		JP 57150044 A	16-09-1982
WO 9741541 A	06-11-1997	AU 2811897 A	19-11-1997


**THIS PAGE BLANK (USPTO)**



(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 091 586 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
11.04.2001 Bulletin 2001/15

(51) Int Cl.7: H04N 7/24

(21) Application number: 00402639.9

(22) Date of filing: 22.09.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Lee, Jin Soo  
Macheon 2-dong, Songpa-ku, Seoul (KR)  
• Yoon, Kyoung Ro  
Dogok 1-dong, Kangnam-ku, Seoul (KR)

(30) Priority: 22.09.1999 KR 9941137

(74) Representative: Verdure, Stéphane et al  
Cabinet Plasseraud, 84 Rue d'Amsterdam  
75440 Paris Cédex 09 (FR)


(71) Applicant: LG ELECTRONICS INC.  
Seoul (KR)

(54) User profile information data structure based on user preference and multimedia data browsing system

(57) The present invention relates to an user profile information data structure for browsing of multimedia data and a multimedia browsing method using the same.  
The multimedia data browsing method is characterized in that: (a) multimedia data contains a contents description scheme for indexing/browsing based on contents;

(b) an user profile includes an user preference description scheme indicating an user-preferred multimedia browsing method or browsing criterion; and (c) multimedia data is browsed by analyzing the user-preferred application description scheme for user-preferred browsing in a corresponding user profile, if the user desires multimedia browsing.

FIG. 2

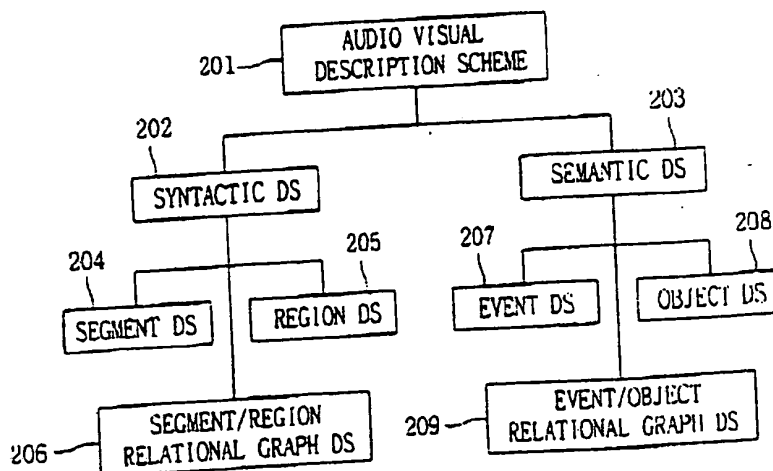

EP 1 091 586 A2

## Description

## BACKGROUND OF THE INVENTION

## 1. Field of the Invention

[0001] The present invention relates to an user profile information data structure for browsing of multimedia data and a multimedia browsing method using the same, and more particularly, to a content-based multimedia data indexing and browsing system in which an user-preferred browsing method is contained in an user profile, and multimedia browsing based on user preference is provided using an user-preferred browsing information contained in this profile, in implementing multimedia data browsing.

## 2. Description of the Background Art

[0002] In multimedia data indexing and browsing in the conventional art, there have been introduced techniques for variously displaying multimedia data based on user preference.

[0003] In internet shopping by using of a multimedia data indexing and browsing system based on user preference, there is a method of selecting only preferred items stored in an user profile by each user and displaying each product in a different way, not displaying all information items used in the internet shopping.

[0004] For example, in the case that some user mainly uses price and specification information, some user mainly uses design information, and some user mainly uses product information of a certain particular company in checking electronic products through the internet shopping, each user is given the above preferred information as its own user profile. In case that an user mainly uses price and specification in this preferred information, merely the information containing only price and specification is displayed to the user although other information such as photographs is provided by the user. And, in case of an user who prefers design information, design(photograph) information is mainly displayed. In this way, the information appropriate for the preference of each user is displayed.

[0005] In addition, there have been introduced techniques for providing a terminal desk-top interface such as a computer to an user in an user-desired form in a multimedia indexing and browsing system based on user preference in the conventional art.

[0006] In other words, the terminal desk-top interface that the corresponding user prefers (or designates) is recorded in its user profile, and then the form of the interface stored in the corresponding user profile is provided to the user.

[0007] Besides, there have been techniques for supporting help information in the form that user prefers using the recorded usage pattern of user in another conventional art.

[0008] The above-mentioned techniques considering user preference(use pattern) in the conventional art all reflects partial user preference in the current restricted application.

[0009] Nowadays, the content description is described in the data for supporting the content-based multimedia indexing/browsing. In the case the various browsing method are possible, so if there is the information describing user preference, user can browse multimedia data in the preferred browsing method using preferred browser.

[0010] In other words, among a variety of browsers for performing content-based multimedia data indexing and browsing, there may be browsers that is particularly preferred, or browsers that is preferred by the type of multimedia data to the user. However, since the maintenance and management of such data is not achieved, the user cannot enjoy his or her right to various selection, but also must be satisfied with parts of the browsers restrictively provided in a given environment.

## SUMMARY OF THE INVENTION

[0011] Accordingly, it is an object of the present invention to provide a user profile information structure in which multimedia data indexing and browsing can be implemented in an user-preferred browsing form, and a multimedia data browsing method using the same.

[0012] It is another object of the present invention to provide an user profile information structure in which an user-preferred browsing method is contained, for displaying the multimedia data in an user preferred form, and a multimedia data browsing method using the same, in implementing multimedia data indexing and browsing.

[0013] It is another object of the present invention to provide an user profile information structure in which an user-preferred browsing method is checked from an user profile, and an application(or browser) is designated according to user preference if there are plurality of applications providing the corresponding browsing method, or an application satisfying the corresponding service is downloaded from other designated place and is provided to the user if there is not such an application, and a multimedia data browsing method using the same.

[0014] To achieve the above objects, in content-based multimedia data browsing, there is provided an user profile information structure according to the present invention, which includes an user-preferred application description scheme for browsing in an user profile, in order to provide an user-preferred multimedia browsing method.

[0015] In addition, the user-preferred application description scheme stored in the user profile is an application ID, or application locator.

[0016] In addition, the application description scheme stored in the above user profile further includes a layout

description scheme of an application.

[0017] In addition, the number of user-preferred application description schemes stored in the user profile may be plural, and each of the application description schemes further includes a weight describing user preference.

[0018] In addition, the user-preferred application description schemes stored in the user profile are different from one another according to the type(genre) of a multimedia data object, each of the application description schemes is structured hierarchically, and the part of the application description scheme having a weight describing scheme based on user preference.

[0019] To achieve the above objects of the present invention, in contents-based multimedia data browsing, there is provided a multimedia data browsing method according to the present invention which is characterized in that: (a) multimedia data contains a contents description scheme for indexing/browsing multimedia data; (b) an user profile includes an user preference description scheme indicating an user-preferred multimedia browsing method or browsing criterion as an application description scheme for user-preferred browsing; and (c) multimedia data is browsed based on the user-preferred application description scheme for user-preferred browsing in a corresponding user profile, if the user desires multimedia browsing. In addition, in the multimedia data browsing method of the present invention, the user-preferred multimedia data browsing method or browsing criterion are described differently according to the type or genre of multimedia data, and a multimedia data is browsed based on the description scheme describing each user-preferred browsing method or browsing criterion.

[0020] In addition, in the multimedia data browsing method of the present invention, the user-preferred multimedia browsing method or browsing criterion is a character-oriented browsing, character/place relation-oriented browsing, time sequential and scene-oriented browsing, or combination thereof.

[0021] In addition, in the multimedia data browsing method of the present invention, the number of browsing method or browsing criterion described differently according to the type of multimedia data may be one or plural with respect to one type(genre) thereof, and weighted values can be added on these browsing methods or browsing criteria.

[0022] In addition, in the multimedia data browsing method of the present invention, if there is no application satisfying the user-preferred multimedia browsing method or browsing criterion in the current terminal, in displaying the corresponding multimedia data, such an application is downloaded(or plugged-in) for thereby implementing the same.

[0023] In addition, in the multimedia data browsing method of the present invention, if there are a plurality of applications satisfying the user-preferred multimedia browsing method or browsing criterion in the current ter-

minal, in displaying the corresponding multimedia object based on the user-preferred multimedia browsing method or browsing criterion, a locator of an application or browser is included so as to select an appropriate application among the plurality of applications, and the multimedia object is displayed by selecting the application indicated by the locator of the application or browser.

[0024] Additional advantages, objects and features of the invention will become more apparent from the description which follows.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The present invention will become better understood with reference to the accompanying drawings which are given only by way of illustration and thus are not limitative of the present invention, wherein:

Figure 1 is a schematic view illustrating the construction of a multimedia system according to the present invention;

Figure 2 is a view illustrating an example of a contents description scheme structure of a multimedia object according to the present invention;

Figure 3 is a view illustrating an user profile information data structure according to a first embodiment of the present invention,

Figure 4 is a view illustrating an user profile information data structure according to a second embodiment of the present invention;

Figure 5 is a view illustrating a preference description scheme in an user profile information data structure according to the present invention;

Figure 6 is a view illustrating an example of a browsing based on user preference,

Figure 7 is a view illustrating another example of a preference description scheme in an user profile information data structure according to the present invention, and

Figure 8 is a view illustrating another example of a browsing based on user preference.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] The preferred embodiments of the present invention will now be described in detail with reference to the accompanying drawings.

[0027] First, Figure 1 is a schematic view illustrating an example of the construction of a multimedia data service system according to the present invention;

[0028] A multimedia object 101 has a contents description 101a for content-based indexing/browsing and a data stream 101b.

[0029] A terminal 102 includes a central processing unit 103 for performing content-based multimedia indexing and browsing control, a memory 104 for storing a

variety of data, a display device 105 for displaying various information relating to multimedia data indexing and browsing, an user profile reader 106 for reading user profile information, and an user profile.

**[0030]** Here, the user profile reader 106 can have the function of a writer for updating information recorded in the user profile 107 based on the feedback of an user.

**[0031]** In addition the user profile 107 can be a movable medium capable of recording and storing information in the form of a smart card

**[0032]** In addition, an user-preferred browsing method or browsing criterion is described in the user profile 107, and such information can be updated by learning.

**[0033]** The information contained in the user profile 107 is read out from the user profile reader 106, and is downloaded to the memory 104.

**[0034]** The central processing unit 103 decodes the user profile information downloaded to the memory 104 to thus browse the multimedia object 101 using the corresponding display device 105 by the user-preferred browsing method or browsing criterion.

**[0035]** Figure 2 is a view illustrating an example of a contents description scheme structure of a multimedia object for content-based indexing/browsing according to the present invention.

**[0036]** The contents description scheme structure has an audio visual description scheme 201 including a syntactic DS 202 and a semantic DS 203. The syntactic DS 202 includes a segment DS 204, region DS 205, and segment/region relational graph DS 206. The semantic DS 203 includes an event DS 207, object DS 208, and event/object relational graph DS 209.

**[0037]** The syntactic DS 202 describes a physical structure of actual multimedia data, and has segments and regions of the actual multimedia data and information on the relation(link) between them, thus making it possible to index and browse a corresponding section or scene of the multimedia data.

**[0038]** The semantic DS 203 describes a semantic structure of multimedia data. In case of a multimedia data, for example, moving pictures such as drama, events objects(characters, places, etc.), and the relation between events and characters or places are described, thus enabling content-based indexing and browsing of multimedia data.

**[0039]** The description scheme structure of the multimedia data for content-based multimedia data indexing and browsing is not limited to that as shown in Figure 2, and can be varied in various forms for the purpose of more effective browsing.

**[0040]** Figure 3 is a view illustrating an user profile information data structure for content-based multimedia data browsing according to a first embodiment of the present invention;

**[0041]** The user profile information data structure has a data browsing DS 301 including data type DS 302 and a browsing preference DS 303. Such a data browsing DS structure can be given by the type or genre of each

multimedia object.

**[0042]** The browsing preference DS 303 corresponds to the data type DS 302.

**[0043]** The browsing preference DS 303 includes a browser DS 308 as an application DS satisfying user preference and a functionality DS 304 for describing a browsing method or browsing criterion.

**[0044]** The functionality DS 304 for describing a browsing method or browsing criterion has a reference to browser DS 305 for connecting a corresponding browser, a function DS 306 for selecting a browser, and a weight DS 307 for describing a corresponding weight value.

**[0045]** The application DS 308 has a weight DS 309, locator DS 310, and reference to functionality DS 311 for reference to a description scheme for describing a browsing method or standard.

**[0046]** Therefore, by means of the user profile relating to such a user-preferred browsing method(or browsing criterion), it is possible to display a certain particular multimedia data by the user-preferred browsing method or standard in a system of Figures 1 and 2.

**[0047]** In other words, when an user displays a multimedia data based on the user profile information, a corresponding application(browser) satisfying description schemes 304 through 307 for describing the user-preferred browsing method or standard for the corresponding data, or having been described in the application description schemes 308 through 311 is indexed in the terminal

**[0048]** If the corresponding application exists in the terminal, multimedia data is displayed using the same, or if it does not exist in the terminal, the corresponding application is downloaded using the locator DS 310.

**[0049]** In addition, the number of application(browser) included in the application DS is one or more than one. If the number of application is plural, an user-preferred application is employed using the weight DS 309 which is learned based on user preference(user feedback/user's usage pattern of a certain particular browser) for each application.

**[0050]** Figure 4 is a view illustrating an user profile information data structure for content-based multimedia browsing according to a second embodiment of the present invention, which is formed by further including a layout description scheme of a browser in addition to the structure as described in Figure 3. In this case, the user can describe preference on a browser according to a certain particular type of multimedia data, but also can describe layout preference DS of the corresponding browser.

**[0051]** As illustrated in Figure 4, the user profile information data structure has a data browsing DS 401 including a data type DS 402 and a browsing preference DS 403. Such a data browsing DS structure can be given by the type or genre of each multimedia data.

**[0052]** The browsing preference DS 403 corresponds to the data type DS 402.

[0053] The browsing preference DS 403 includes a browser DS 408 as an application DS satisfying user preference, a functionality DS 404 for describing a browsing method or browsing criterion, and a layout DS 413 of the browser

[0054] The functionality DS 404 for describing a browsing method or browsing criterion has a reference to browser DS 405 for reference to a corresponding browser, a function DS 406 for selecting a browser, and a weight DS 407 for describing a corresponding weight value.

[0055] The application DS 408 has a weight DS 409, locator DS 410, reference to functionality DS 411 for reference to a description scheme for describing a browsing method or standard, and reference to layout DS 412 for layout..

[0056] The layout DS 413 has a weight DS 414 for the layout and a reference to browser DS 416 for reference to the browser.

[0057] Therefore, by means of the user profile relating to such a user-preferred browsing method(or browsing criterion), it is possible to display a certain particular multimedia data by the user-preferred browsing method or standard in a system of Figures 1 and 2. In addition, the layout preference DS of the corresponding browser can be described.

[0058] In other words, when an user displays a multimedia data based on the user profile information, a corresponding application(browser) satisfying description schemes 404 through 407 for describing the user-preferred browsing method or standard for the corresponding object, or having been described in the application description schemes 408 through 411 is indexed in the terminal.

[0059] At this time, an user-preferred layout of the browser is displayed using the layout DS 413 through 416 and the reference to layout DS 412 in the browser DS.

[0060] If the corresponding application exists in the terminal, multimedia data is displayed using the same, or if it does not exist in the terminal, the corresponding application is downloaded using the locator DS 410.

[0061] In addition, the number of application(browser) included in the application DS is one or more than one. If the number of application is plural, an user-preferred application is employed using the weight DS 409 which is learned based on user preference for each application.

[0062] Figure 5 is a view illustrating a description scheme of a browsing method or criterion in an user profile information data structure as shown in Figure 3 or Figure 4 according to a first embodiment of the present invention.

[0063] The structure of Figure 5 is a function description scheme structure for indexing and displaying a corresponding multimedia data based on character/relation, and includes a basic key item 501 and an order of key item 502.

[0064] The basic key item describes browsing on the basis of character and relation 503 and 504. Figure 6 illustrates an example of a browsing according to such a scheme structure.

[0065] As shown in a video browser(user interface) of Figure 6, a character screen unit 602 of a character relational screen unit 601 displays characters, and a character-relation screen unit 603 displays character-relation satisfying a relation which is selected here.

[0066] In addition, a main scene screen unit 604 displays main scenes satisfying the corresponding relation in key frames 604a. Here, it is shown that a main screen unit 605 displays a selected particular scene in more detail.

[0067] Figure 7 is a view illustrating a description scheme of a browsing method or criterion in an user profile information data as shown in Figure 3 or Figure 4 according to a second embodiment of the present invention.

[0068] The structure of Figure 7 is a function description scheme structure for displaying a corresponding multimedia data using a 3-level tree in time sequential key frames, and includes a basic key item 701 and an order of key item 702.

[0069] The basic key item describes browsing on the basis of key frames, and the order of key item 702 describes time sequential browsing, and describes that the basic key item has a hierarchical structure(depth of key item, level-1=3...).

[0070] Figure 8 is a view illustrating an example of an interface of a browser using the function description scheme structure of Figure 7.

[0071] As shown in a video browser(user interface) of Figure 8, a key frame unit 601 displays multimedia contents in key frames in a time sequence, and a main screen unit 802 displays a section which is selected here and is represented by key frames.

[0072] According to the user profile information data structure and browsing method using the same of the present invention, while implementing content-based moving picture indexing and browsing, an user-preferred browsing method(application) can be provided by each corresponding multimedia data.

[0073] Therefore, with respect to a multimedia data selected by the user, the user-preferred browser(application) can display the corresponding multimedia data.

[0074] In addition, in the present invention, since the corresponding multimedia data is indexed and browsed by a browser which is close or identical to the user-preferred browsing method(application), an user-friendly and user-adaptive indexing and browsing environment can be provided when multimedia data is indexed and browsed based on contents.


[0075] As the present invention may be embodied in several forms without departing from the spirit or essential characteristics thereof, it should also be understood that the above-described embodiments are not limited by any of the details of the foregoing description, unless

otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the meets and bounds of the claims, or equivalence of such meets and bounds are therefore intended to be embraced by the appended claims.

## Claims

1. In a content-based multimedia data browsing, an user profile information data structure comprises an user-preferred application description scheme for browsing in an user profile in order to provide an user-preferred multimedia browsing method.
2. The user profile information data structure of claim 1, wherein the user-preferred application description scheme stored in the user profile is an application ID, or application locator.
3. The user profile information data structure of claim 2, wherein the application description scheme stored in the user profile further comprises a layout description scheme of applications
4. The user profile information data structure of claim 1, wherein the number of user-preferred application description schemes stored in the user profile may be plural, and each of the application description schemes further comprises a weight for describing user preference.
5. The user profile information data structure of claim 1 or 4, wherein the user-preferred application description scheme stored in the user profile may be a plurality of application description schemes which are different from one another according to the type (genre) of a multimedia data object, and each of the plurality of application description schemes further comprises a weight describing user preference corresponding to an user feedback.
6. The user profile information data structure of claim 5, wherein each of the user-preferred application description schemes is structured hierarchically, and each part of the description schemes has a weight describing user preference.
7. In content-based multimedia data browsing, a multimedia data browsing method, characterized in that:
  - (a) multimedia data contains a contents description scheme used in indexing/browsing multimedia data;
  - (b) an user profile includes an user preference description scheme indicating an user-preferred multimedia browsing method or browsing criterion for user-preferred browsing; and
  - (c) multimedia data is browsed by analyzing the user-preferred application description scheme for user-preferred browsing in a corresponding user profile. if the user desires multimedia browsing.
8. The method of claim 7, wherein the user-preferred multimedia data browsing method or browsing criterion are described differently according to the type or genre of multimedia data, and the multimedia data is browsed according to the corresponding description scheme indicating each user-preferred browsing method or browsing criterion.
9. The method of claim 7 or 8, wherein the user-preferred multimedia browsing method or browsing criterion is represented as a character-oriented browsing, character/place relation-oriented browsing, time sequential and scene-oriented browsing, or combination thereof.
10. The method of claim 8, wherein the number of browsing methods or browsing criteria described differently according to the type of multimedia data is at least more than one with respect to one type (genre) thereof, and weighted values can be added on each of the browsing methods or browsing criteria, thus analyzing the user-preferred application.
11. The method of claim 7, wherein an application satisfying the user-preferred browsing method or browsing criterion is executed the locator description scheme of the corresponding application, in displaying the corresponding multimedia data.
12. The method of claim 11, wherein, if the proper application for browsing does not exist in the terminal, the corresponding application is downloaded using the locator description scheme


FIG. 1

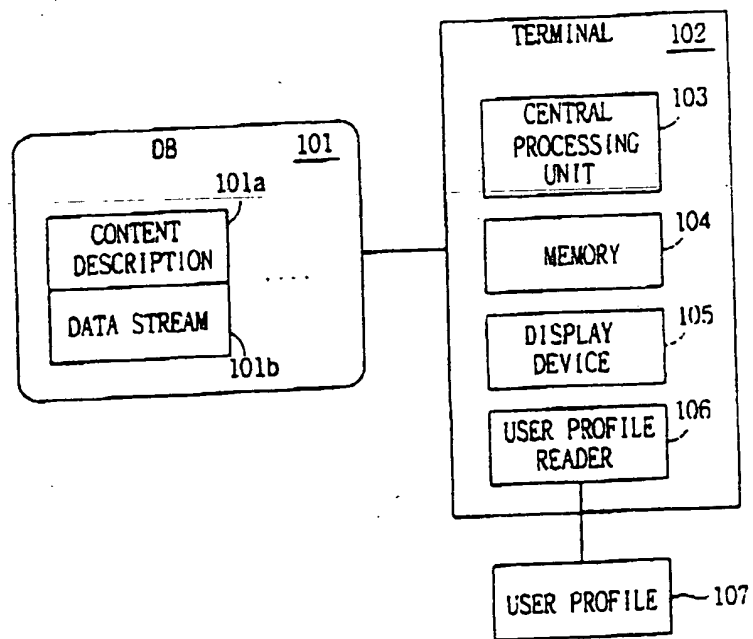

**THIS PAGE BLANK (USPTO)**




FIG. 2

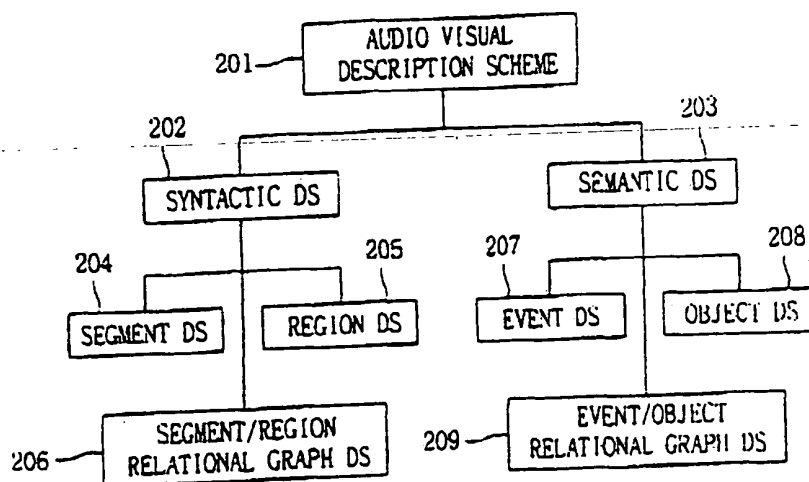


**THIS PAGE BLANK (USPTO)**

FIG. 3

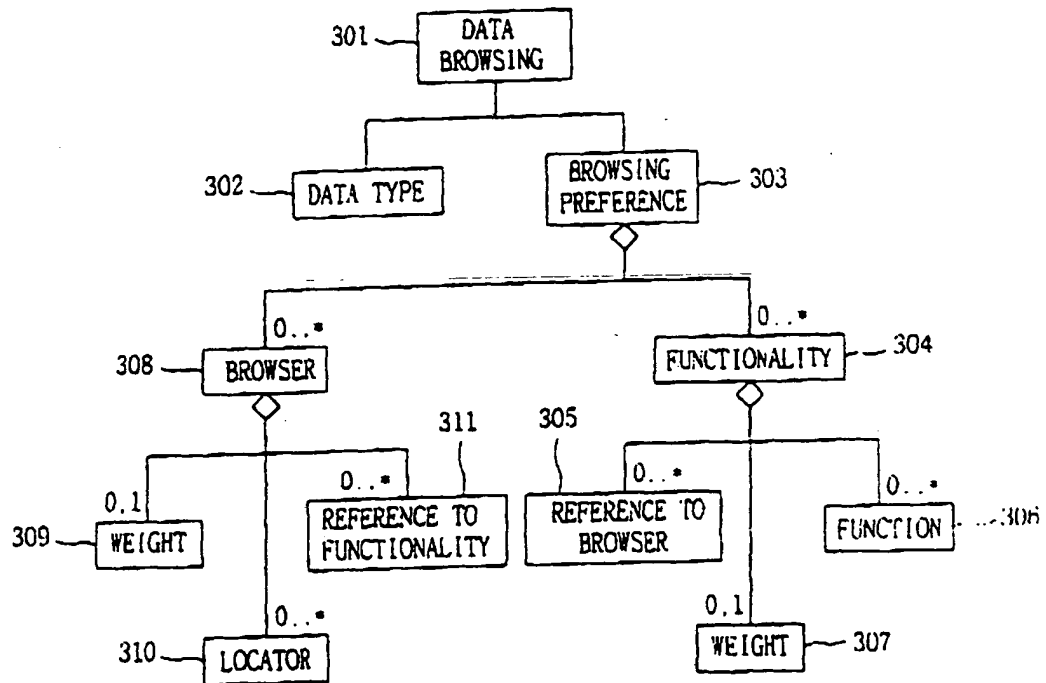


**THIS PAGE BLANK (USPTO)**

FIG. 4

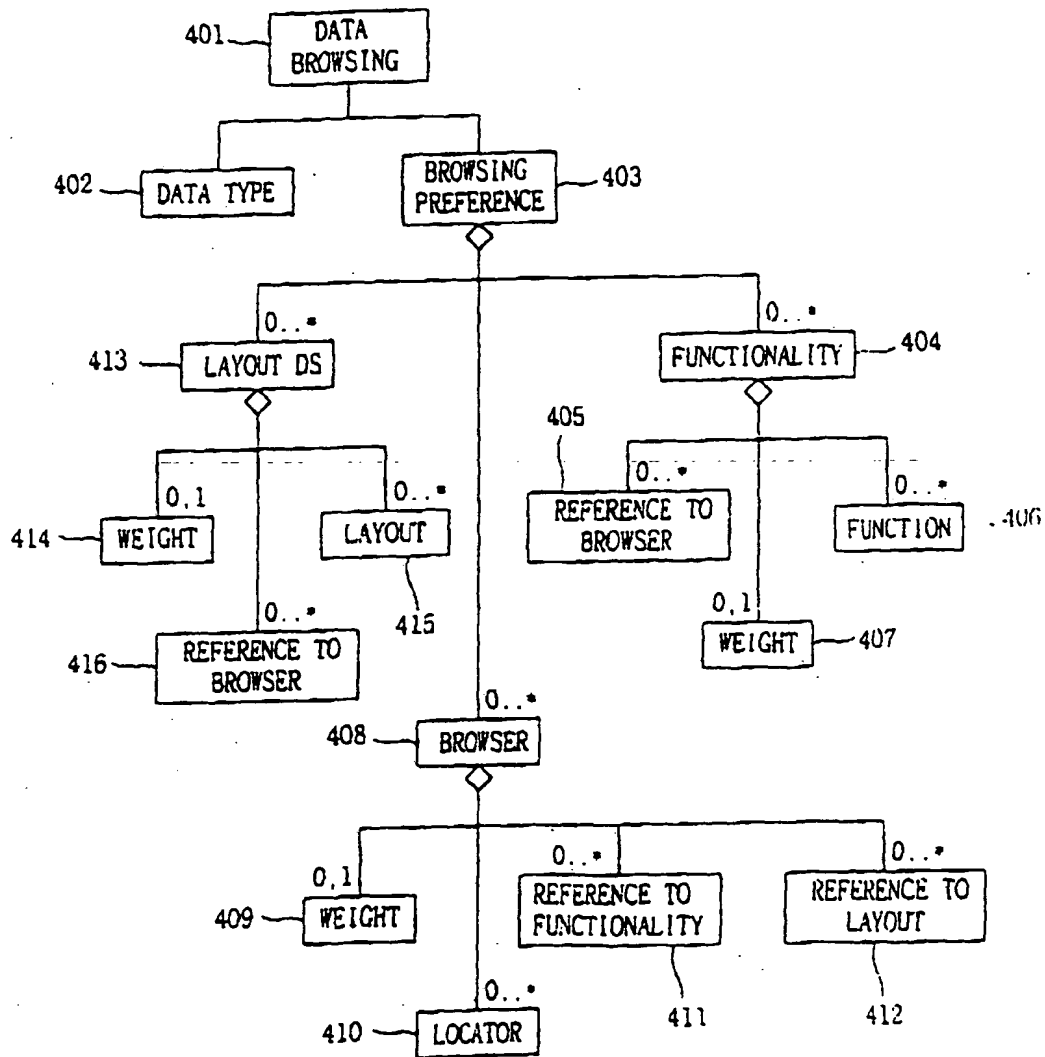

**THIS PAGE BLANK (USPTO)**


FIG. 5

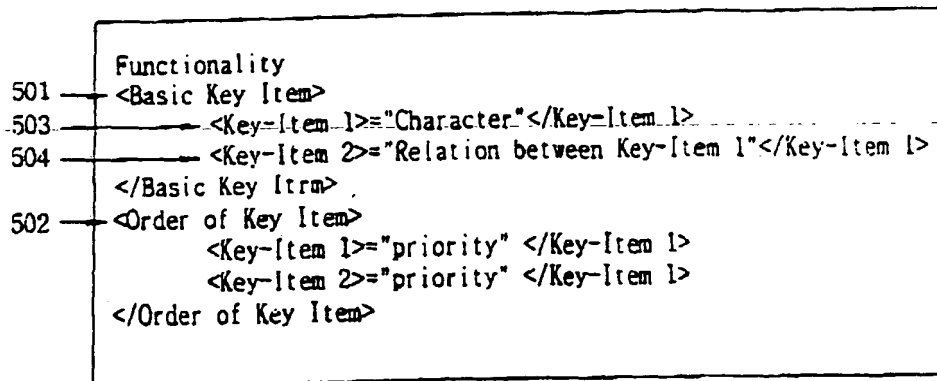

**THIS PAGE BLANK (USPTO)**




FIG. 6

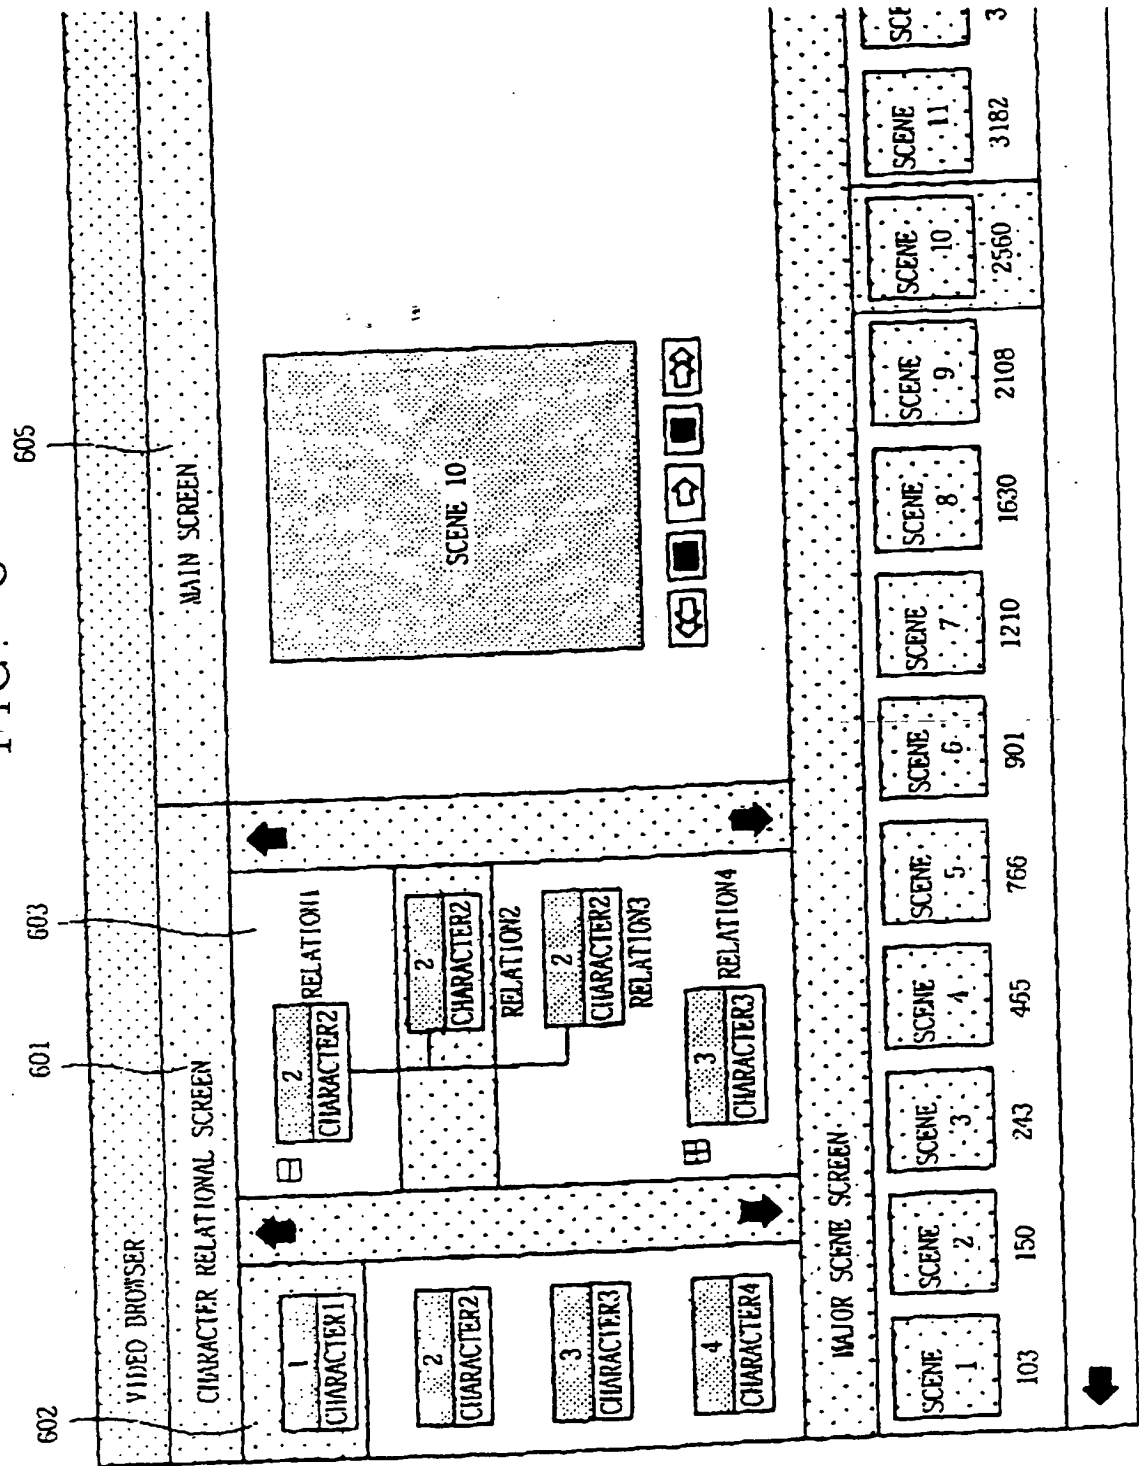


**THIS PAGE BLANK (USPTO)**

FIG. 7

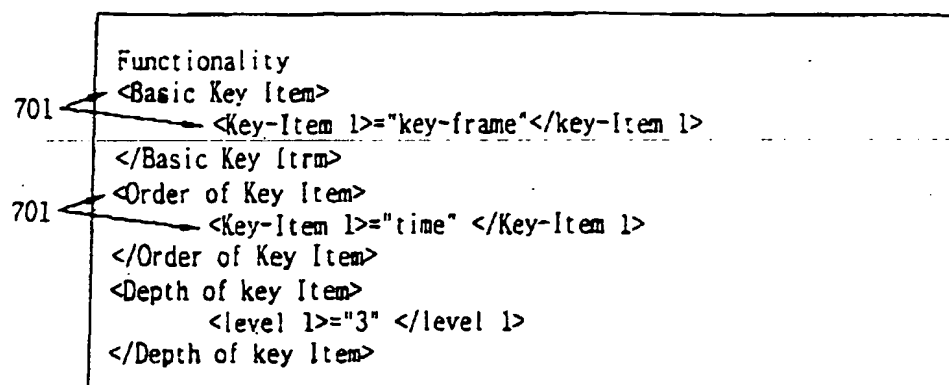

**THIS PAGE BLANK (USPTO)**

FIG. 8

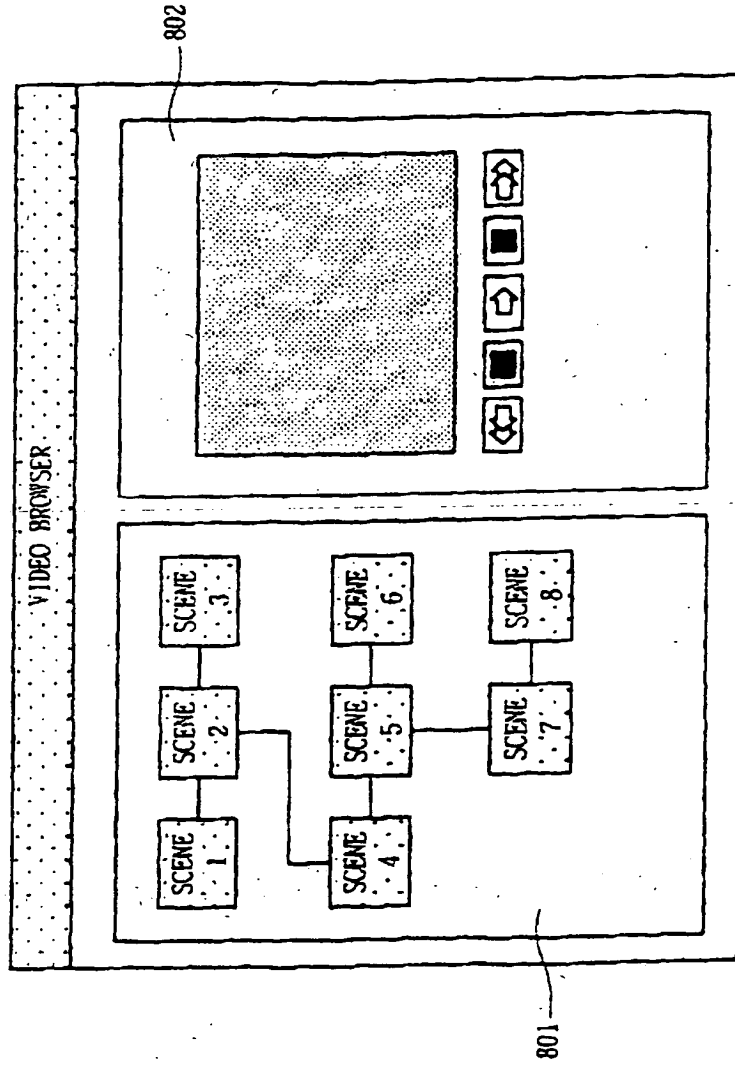

**THIS PAGE BLANK (USPTO)**